

Rotary joint

model **WRA**

Double rotary flange

25MPa



Double rotary type combines two rotaries on same axis to keep the overall height lower still. Two types are available with 12 or 16 circuits, and each circuit can be used independently. Rotary 1 and Rotary 2 rotate independently but they can be synchronized by using a joint pin (included).


Low starting torque

Special seal with lower resistance has been adopted to minimize sliding friction to realize low starting torque.

Usable for both oil and air

Superior sealing capability of special seal can be utilized not only for hydraulic circuits but also for air circuits.

Rotary joint

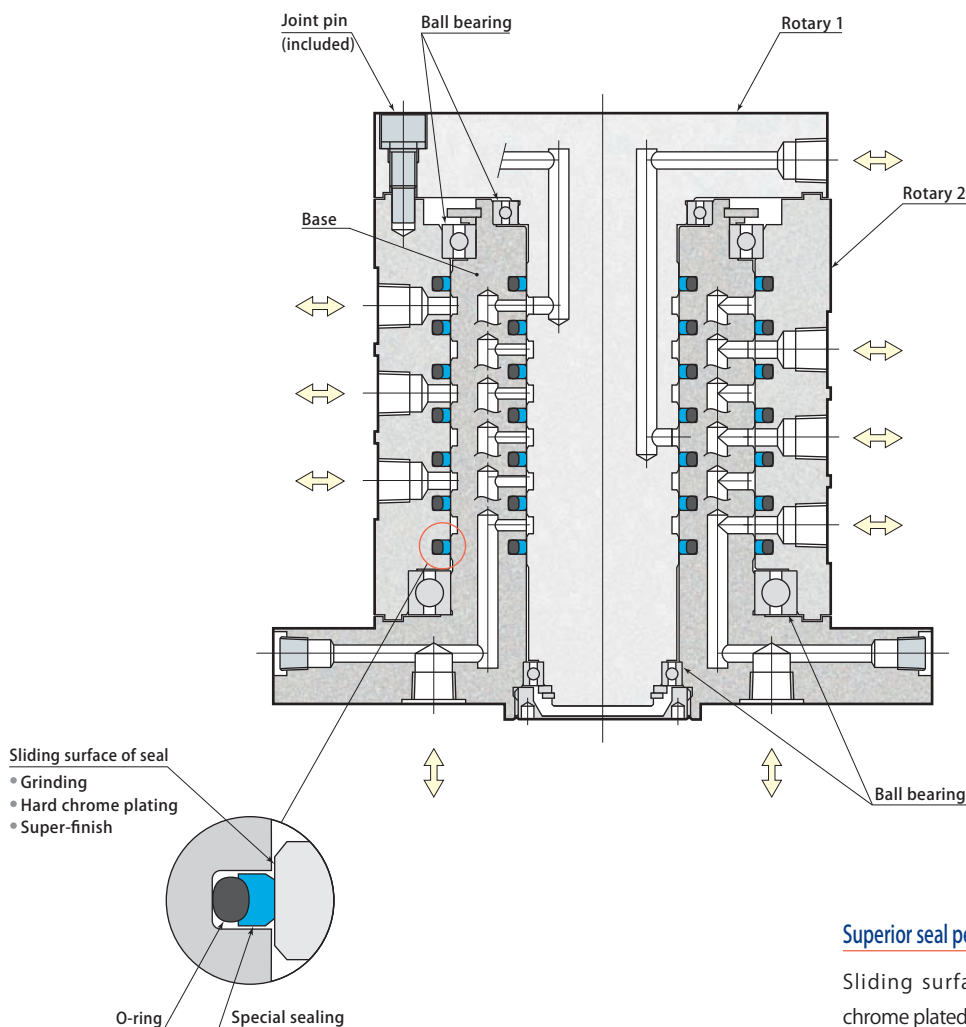

Superior seal performance and durability

Sliding surface is polished, hard chrome plated and then super-finished to offer superior seal performance and durability.

