


Specifications

MODEL	GSC ①-1 ③	GSC ①-2 ③
Fluid used	Air	
Type of Seal	Metal Seal	
Solenoid Valve	2 Position Double	
Maximum Pressure	0.7 MPa	
Proof Pressure	1.0 MPa	
Fluid Temperature Range	-5 ~ 60 °C	
Orifice Area	15mm ²	32.4mm ²
Air Piping Diameter	∅ 6	∅ 10
Protection Structure	Dust Proof	
Oil Supply	Nil	

Class Designation

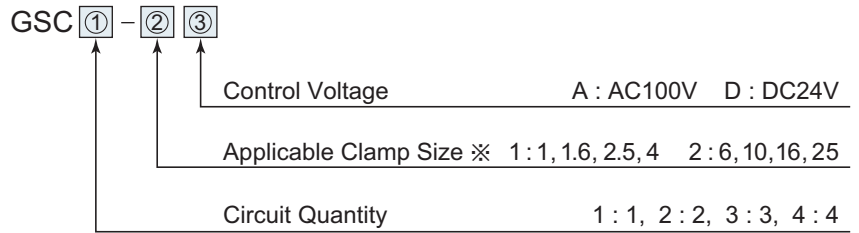

※ : Applicable clamp size shown are for the case when 4 clamps are used per one circuit. When 5 clamps are being used per one circuit, contact us for details.

Remark : The minimum air pressure necessary for unclamp action is 0.39 MPa. Be sure to use at more than 0.39 MPa air pressure.

Dimensions

GSC ①-1 ③

GSC ①-2 ③

Dimension Table

Number of Circuit	GSC ①-1 ③		GSC ①-2 ③		Example
	L 1	Mass	L 2	Mass	
1	355 mm	3.1 kg	417 mm	4.0 kg	Clamp Circuit × 1
2	383 mm	3.6 kg	450 mm	4.7 kg	Clamp Circuit × 2
3	411 mm	4.2 kg	483 mm	5.4 kg	Clamp Circuit × 3
4	439 mm	4.5 kg	516 mm	5.8 kg	Clamp Circuit × 2 Slider Circuit × 2

Specifications are subject to change without prior notice.

QMC-06E-3 2008.03