


Specify **set pressure originally** shown on the name tag.

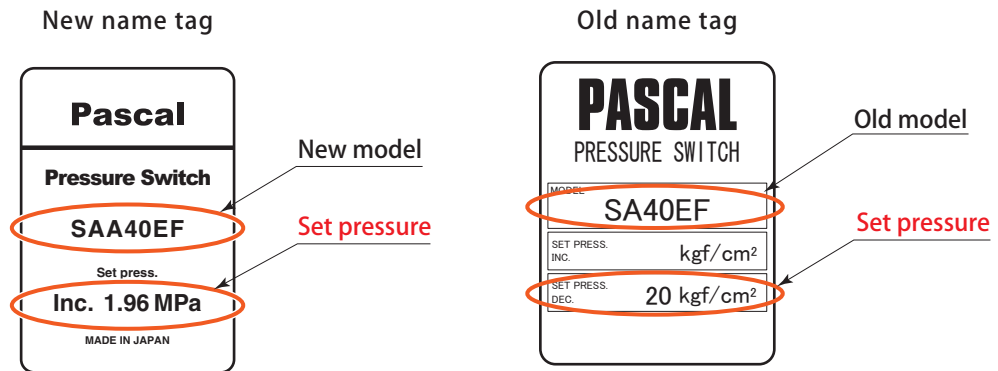

New model is interchangeable with old one.

Specifications (Reference)

Model	SAA40E-F	<p>Schematic symbol</p>
Application	Die-lifter down confirmation	
Set pressure (※) (MPa)	DEC. 1.96 (20kgf/cm ²)	
Set pressure precision	Within ± 1.0 %	
Shock resistance force	max.30G	
Working ambient temperature (°C)	-5~70	
Working fluid	ISO-VG32 equivalent normal operation oil Water-Glycol	
Proof pressure (MPa)	68.6	
Range of set pressure (MPa)	Working pressure on pressurized (INC.) 0.49~3.92 Working pressure on depressurized (DEC.) 0.20~3.43	
Differential pressure (MPa)	0.29~0.49	
Rating	UL/CSA rating AC125V, 250V, 480V-10A 1/8HP-AC125V 1/4HP-AC250V DC 125V-1/2A DC 250V-1/4A	
Switch model	BZ-2RD3000-T4-J (Yamatake Corporation)	
Contact arrangement	Single Pole Double Throw (SPDT)	
Mass (kg)	0.6	

※ The set pressure is subject to the circuit pressure. Refer to the drawing for approval.

Dimensions (Reference)

