


Pascal

air expansion X clamp

double acting


air Double acting model CGX

Innovative workpiece clamping tool

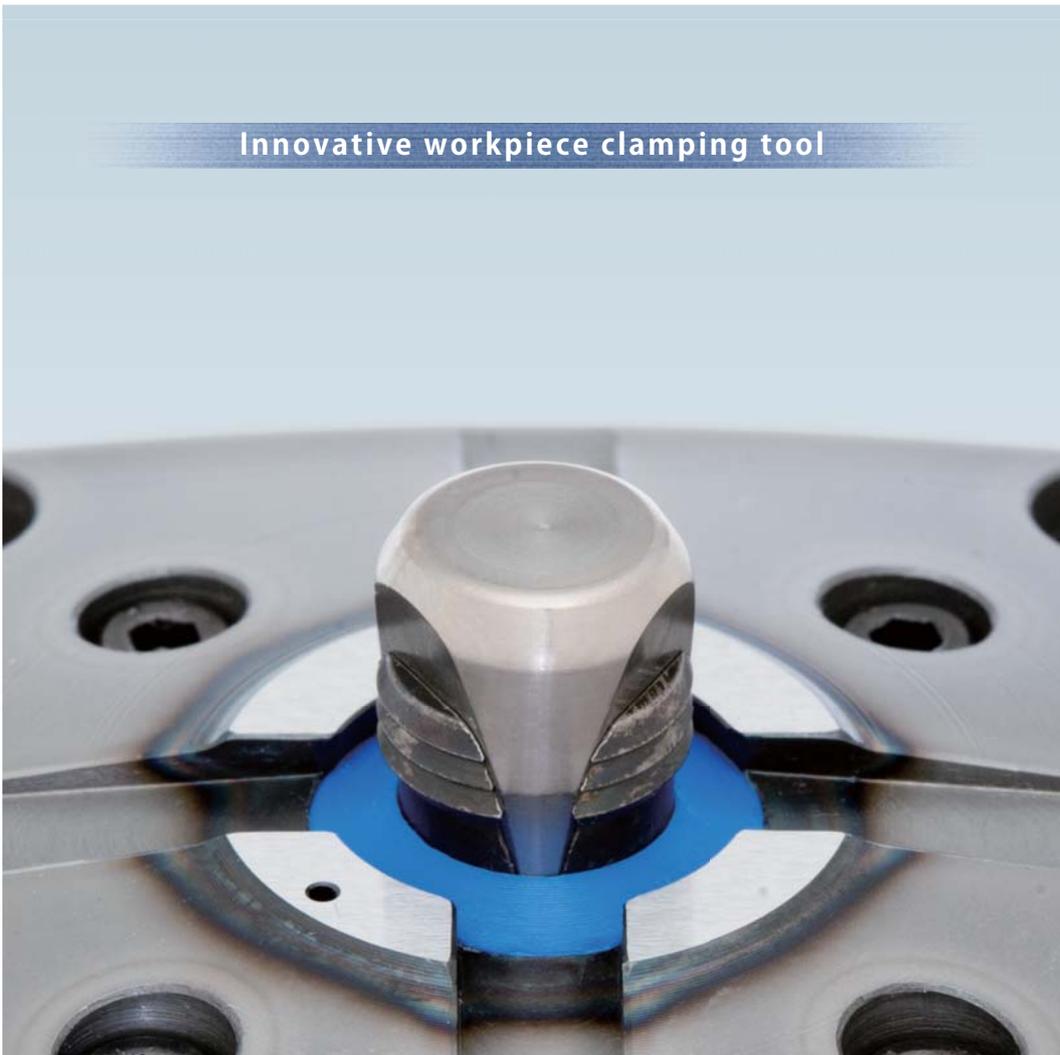


Pascal
www.pascaleng.co.jp



air
Expansion clamp
model
CGX



Outstanding tool accessibility

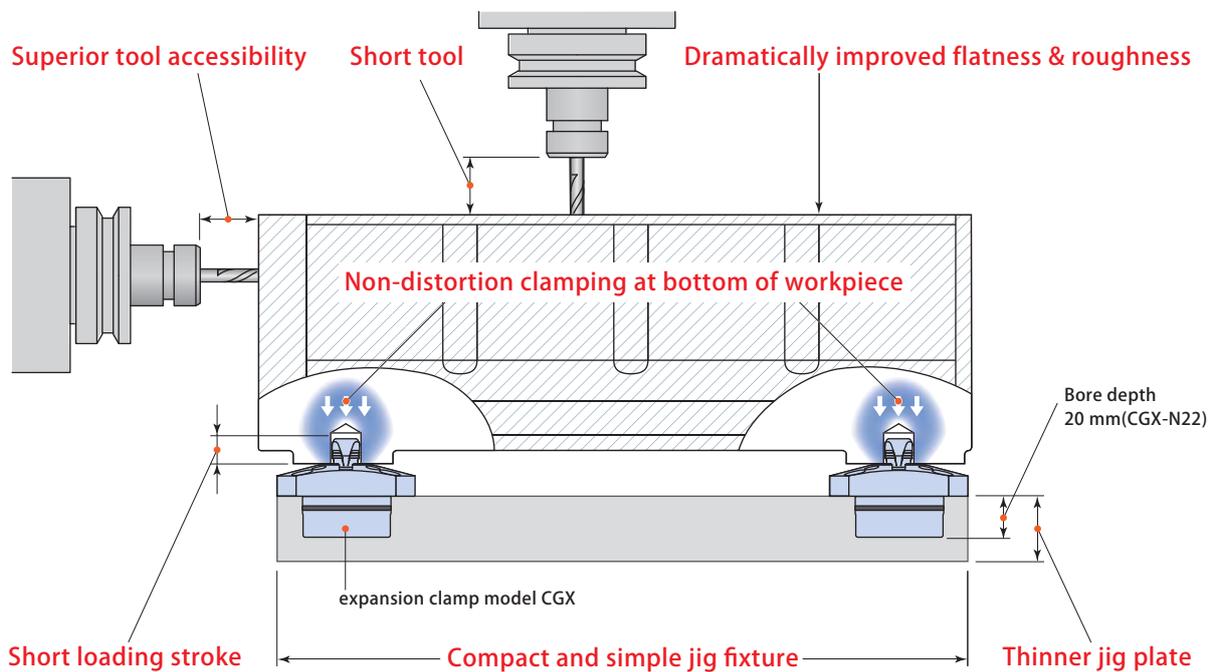


The expansion clamp holds firmly the clamping hole at the bottom of workpiece and clamps it firmly down to the seating surface by utilizing taper rod and tapered surface of gripper. Clamping force is transmitted directly to seating surface and holds workpiece in place firmly without any distortion or deflection, making high grade and stable machining possible.

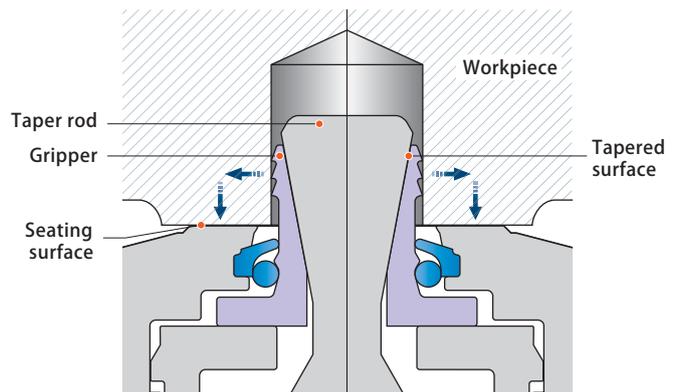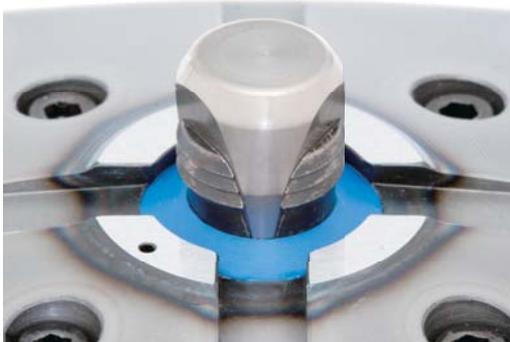


Workpiece setting

- ① Pistons ① & ②, as well as taper rod and gripper are raised by unclamping air.
- ② Set the workpiece onto the seating surface. In order detect if actual unclamping has occurred using the air sensor, allow air needed to confirm seating to flow by using cylinder (or similar) to lift work up during unclamping.

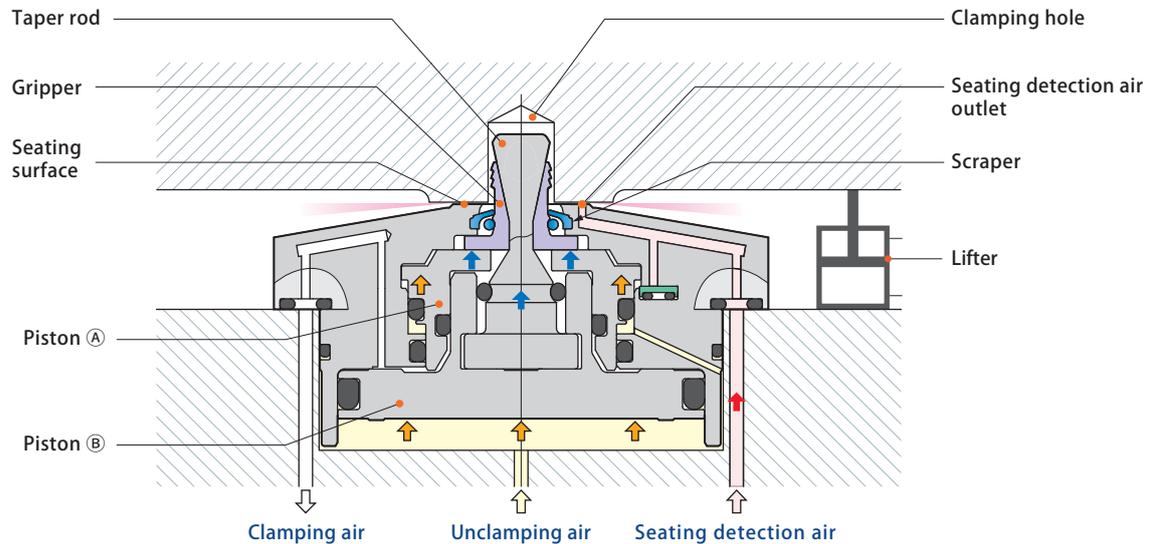

Workpiece holding

- ① Release unclamping air and apply clamping air pressure. Piston ① will remain in upright position as piston ② and taper rod are lowered.
- ② As piston ① remains in upright position, the gripper is expanded horizontally along the tapered surface of the taper rod to grip clamping holes.
- ③ The gripper securely grips the internal face of the clamping holes and pulls the workpiece down firmly onto the seating surface.
- ④ Workpiece holding is completed by the seating detection air sensor, clamping and unclamping air pressure.

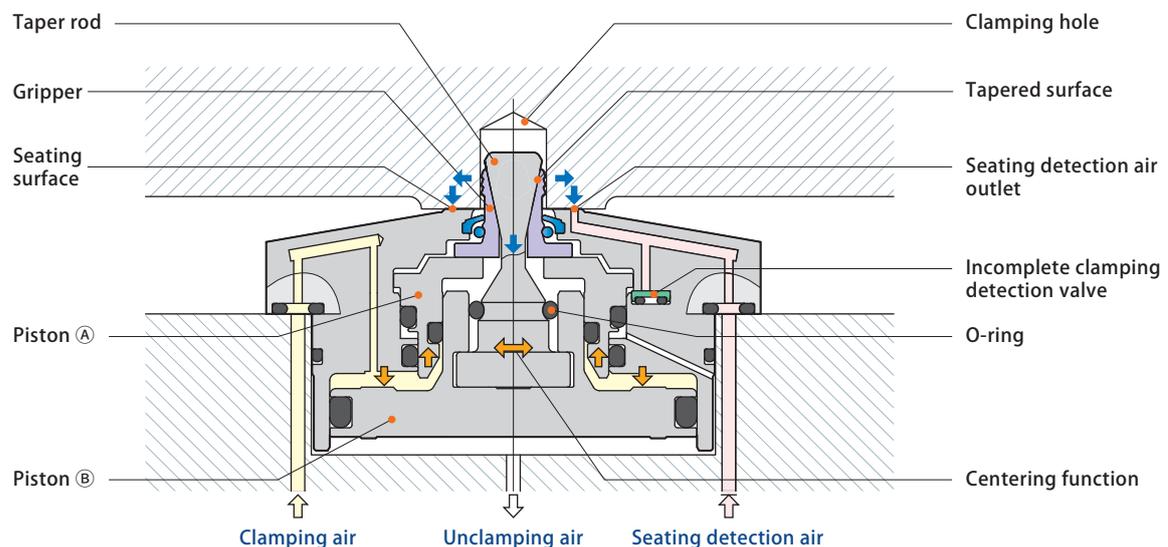

Detects deformation of workpiece and floating of workpiece resulting in faulty setting

When workpiece has significant deformation or when it is set poorly with space of 1.2 mm above seating surface (Figure 1-a) or when metal chips are caught by clamp (Figure 1-b), the workpiece is not held on seating surface and air sensor is unable to detect seating and this confirms incomplete clamping.

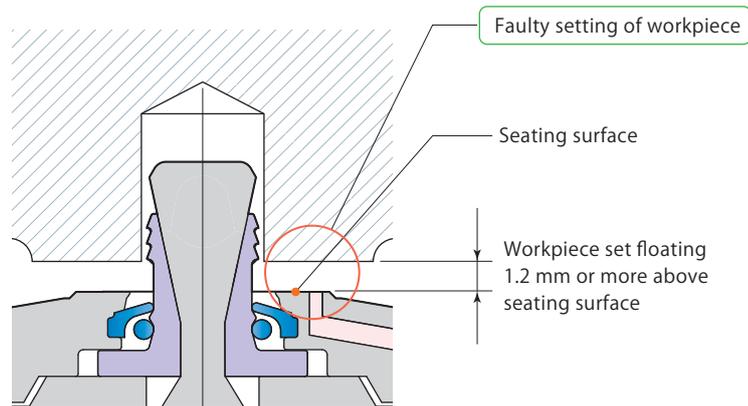


Figure 1-a


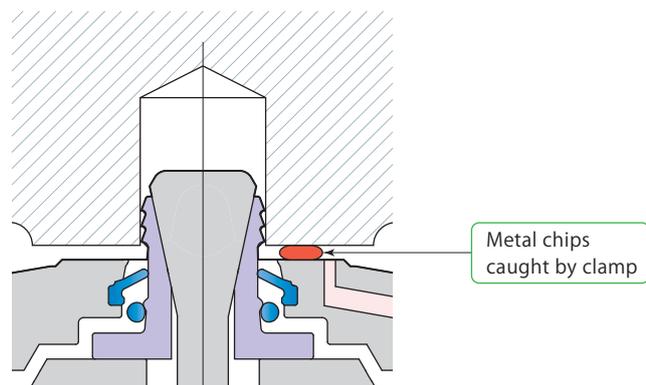



Figure 1-b

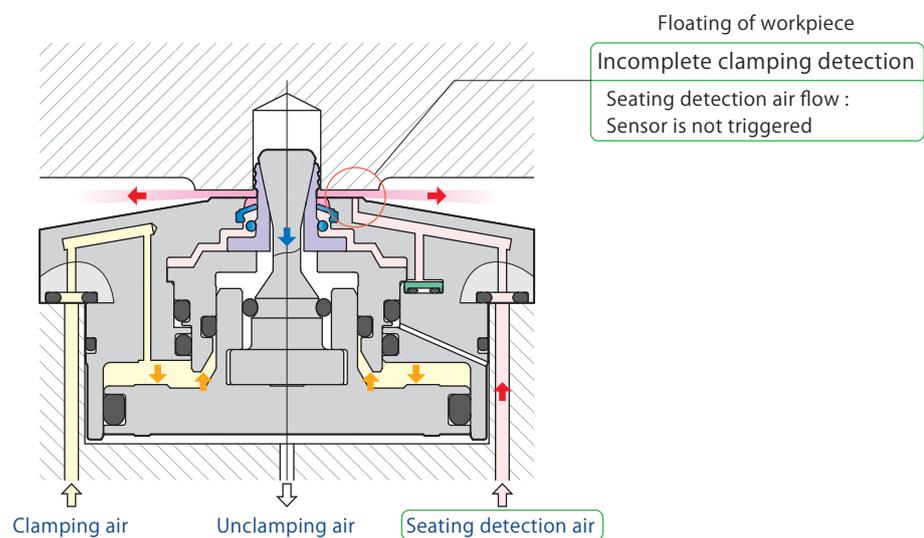

Detects incomplete gripping


PAT. JP4297511

When gripper fails to grip properly due to large draft angle of grip inner diameter, piston ① continues to stroke down until incomplete clamping detection valve ③ is triggered. Since seating detection air is released, air sensor is unable to detect seating of workpiece and this confirms incomplete clamping.

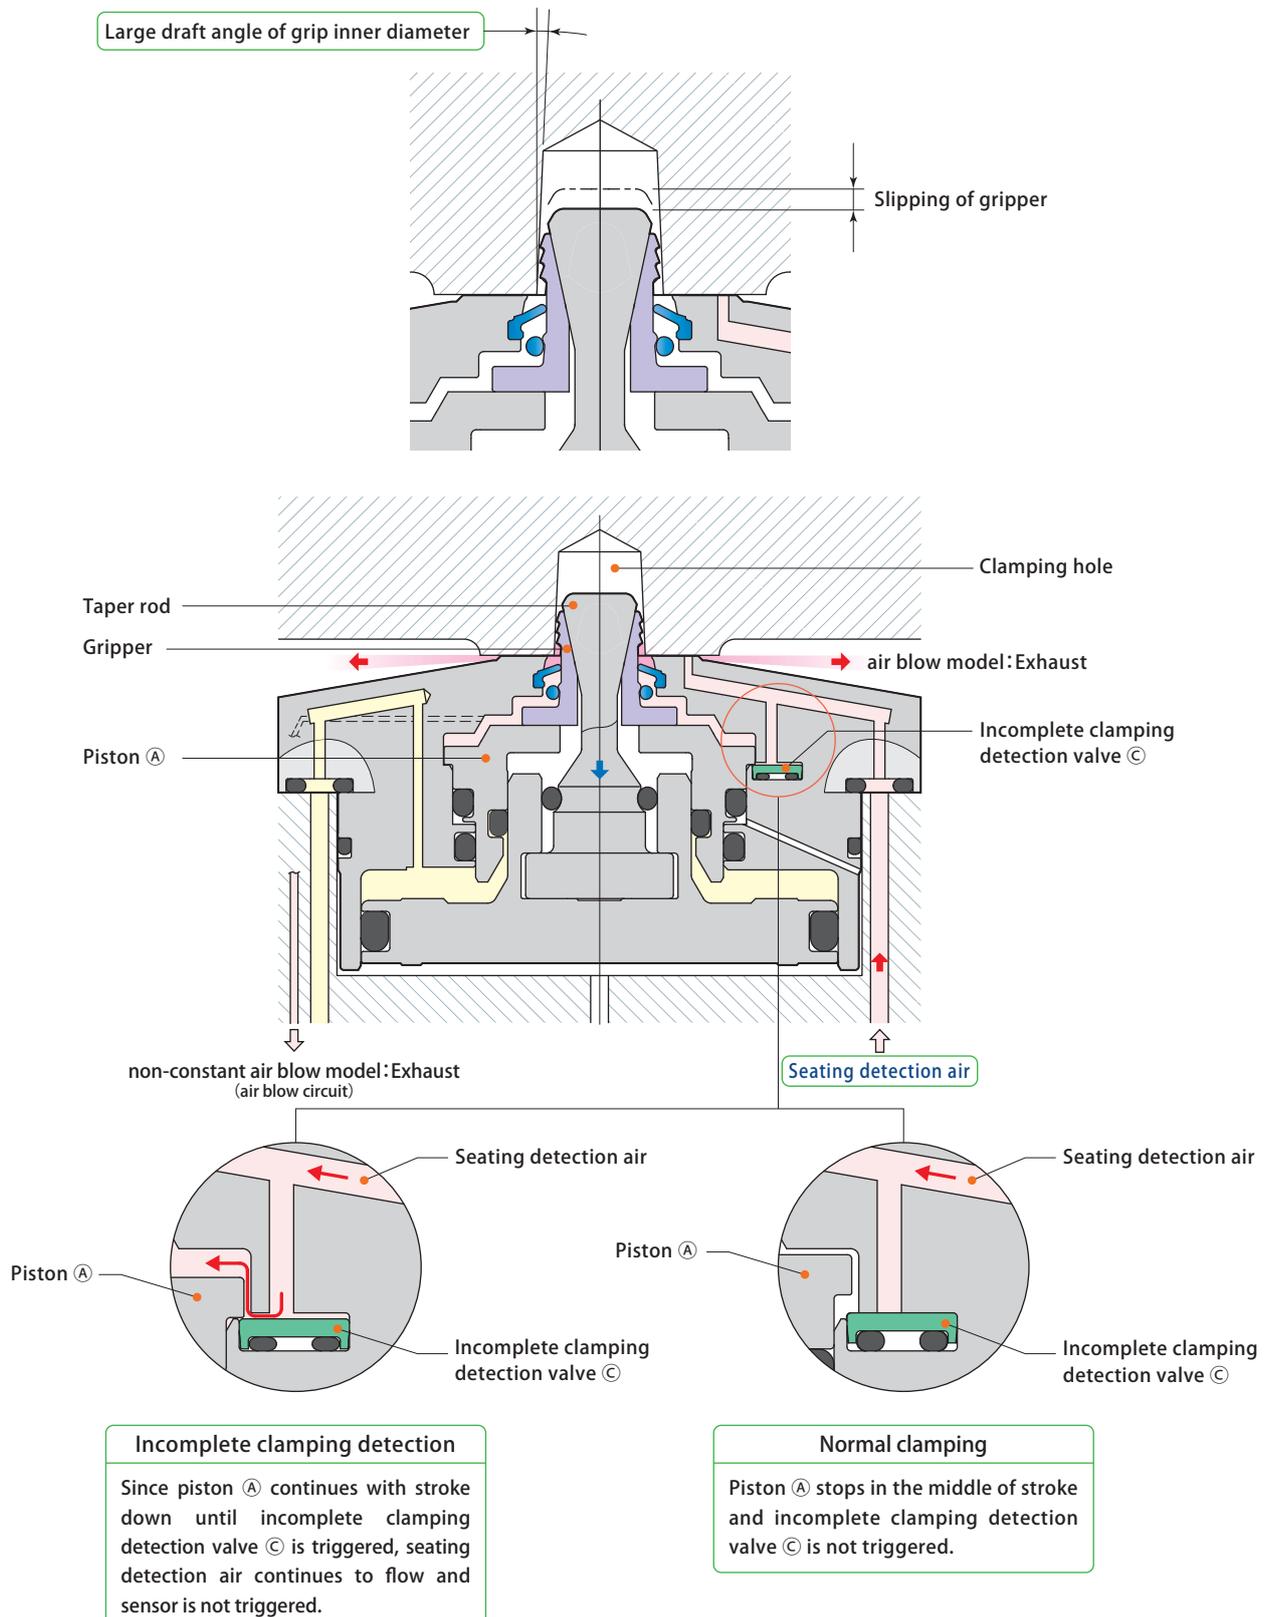

Large gripper expansion stroke


The gripper expands horizontally by 1.0 mm, which enables the accommodation of dimensional variations in diecast bore diameters and ensures workpiece is held securely.

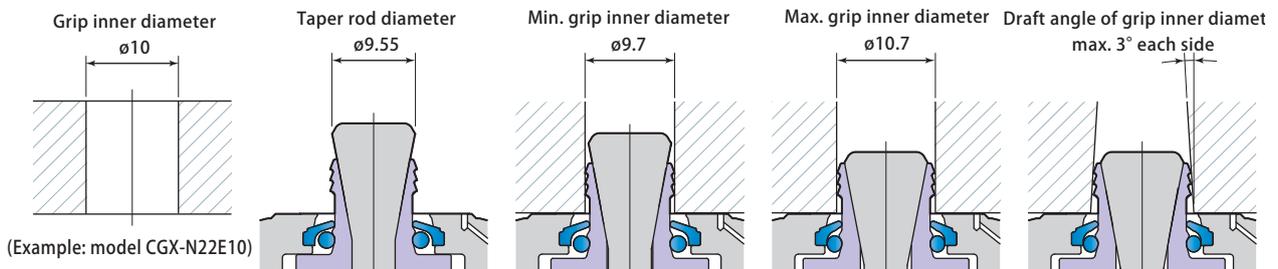

Taper rod and gripper with superior durability


- ① The gripping force of expansion clamp is transmitted from tapered surface to gripper, making it possible for the gripper to hold onto inner diameter of workpiece and hold the workpiece on the seating surface for secure workpiece clamping.
- ② Special steel with superior abrasion resistance is used for gripper to improve durability.
- ③ Tip section of taper rod has larger diameter than gripper and is well chamfered to be a better guide when setting the workpiece.

① Tapered surface

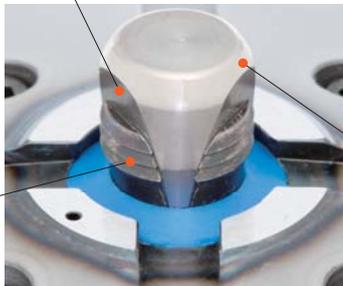

② Gripper

③ Taper rod tip section

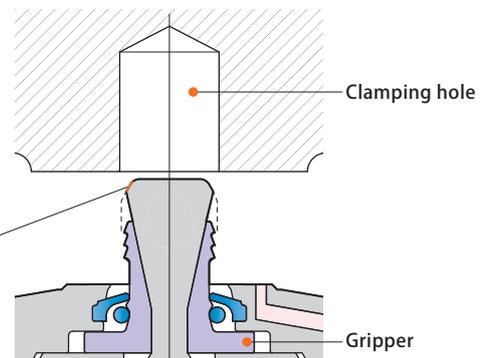


Seating surface can be reground (max. 0.1 mm)

- ① When seating surface is damaged, the flange section can be dismantled and reground.
- ② Flange can be easily dismantled and reassembled at production site.


① Seating surface



② Flange

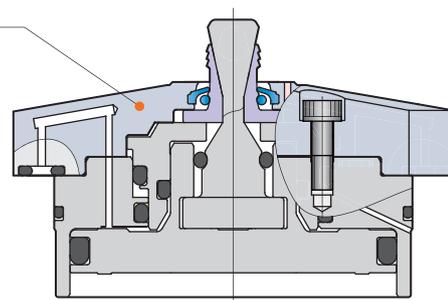


Clamping hole pitch errors can be tolerated

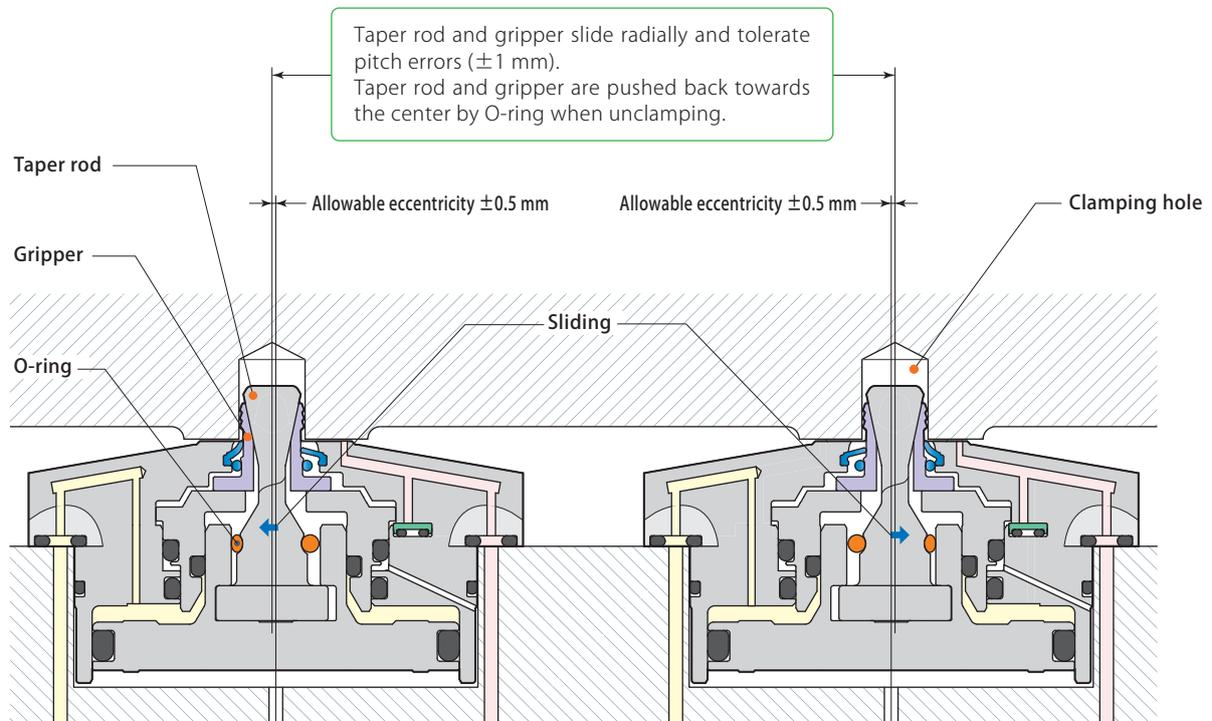

Incorporating strong air blowing circuit

- ① Air blown from a space between the gripper and scraper clears off metal chips and coolant that stay on the seating surface.
- ② Flushing channel is also provided on the seating surface to remove the metal chips and coolants smoothly during workpiece setting.

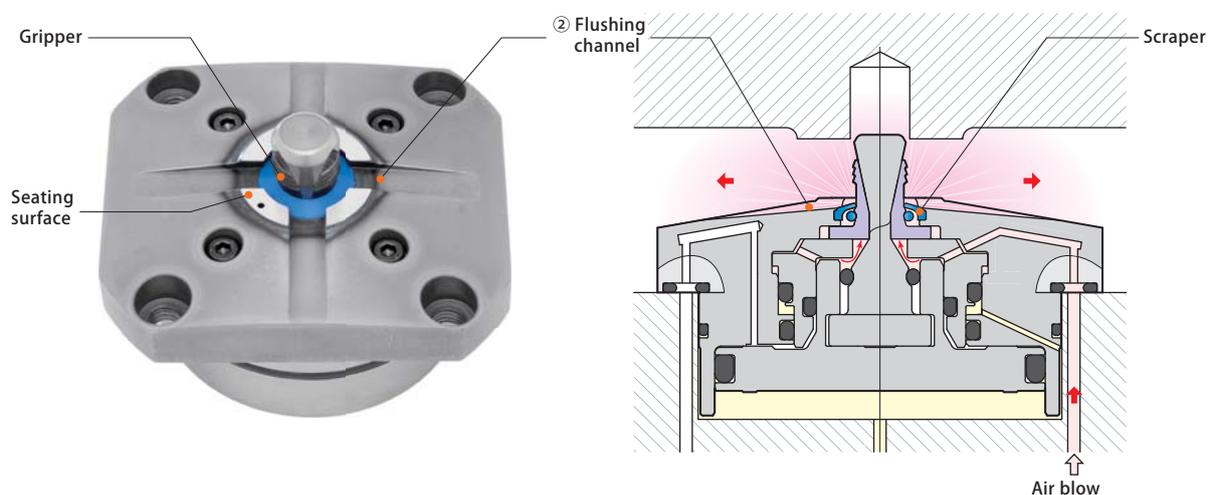

With the development of the non-constant air blow expansion clamp, air consumption will be significantly decreased. The traditional model ordinarily requires 50 ℓ /min (0.3MPa) flow rate (when grip inner diameter is $\varnothing 12$). The new model

Refer to page → 9 and 10

3 Grip $\varnothing 11 \sim \varnothing 13$ Non-constant air blow model

Grip inner diameter	Clamping force (air pressure 0.5 MPa)	Model
$\varnothing 11$ $\varnothing 12$ $\varnothing 13$	0.8 kN	CGX-N22E <small>Grip inner diameter</small>



Refer to page → 11 and 12

2 Grip $\varnothing 9, \varnothing 10$ Non-constant air blow model

Grip inner diameter	Clamping force (air pressure 0.5 MPa)	Model
$\varnothing 9$ $\varnothing 10$	0.8 kN	CGX-N22E <small>Grip inner diameter</small>




Refer to page → 13 and 14

4 Grip $\varnothing 6 \sim \varnothing 8$ Air blow model



Grip inner diameter	Clamping force (air pressure 0.5 MPa)	Model
$\varnothing 6$ $\varnothing 7$ $\varnothing 8$	0.8 kN	CGX-N22- <small>Grip inner diameter</small>



reduces air consumption and is measurably energy saving. Still, be sure to air blow at time of workpiece replacement.

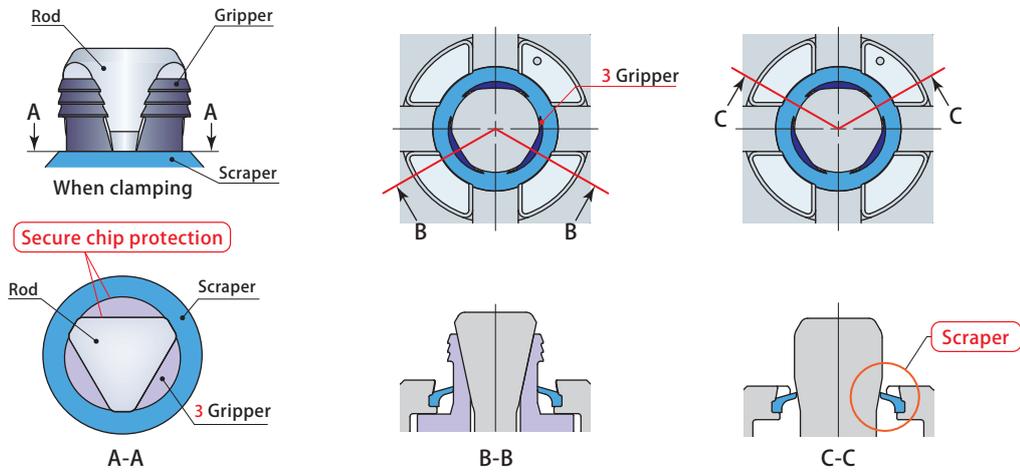

Even for the areas where there is no gripper, air blow during cutting process is not necessary as chip intrusion is prevented thanks to the scraper.

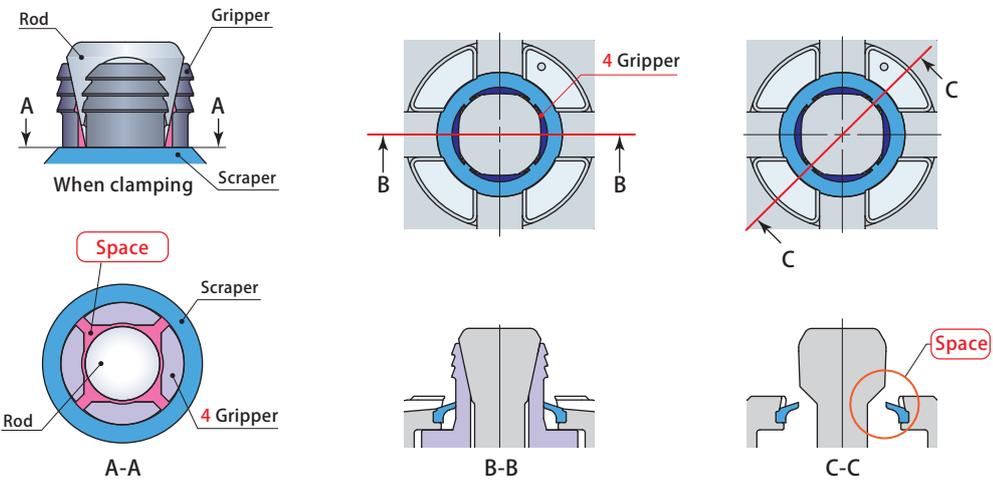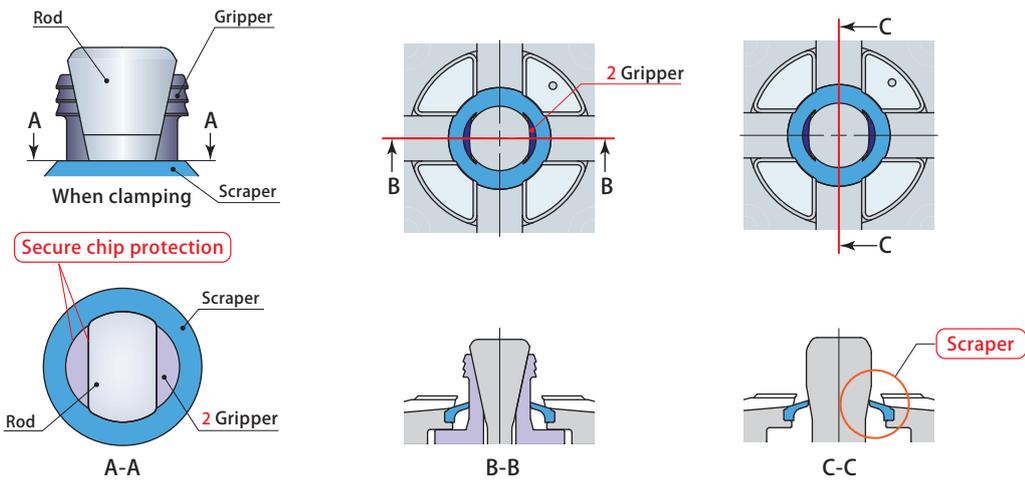


Constant air blow is necessary as sealing will not take place for the areas where there is no gripper.


3 Grip Non-constant air blow model

Grip inner diameter	ø11 ø12 ø13
Model	CGX-N22E Grip inner diameter (Example : CGX-N22E11)
Clamping force	0.8 kN (air pressure 0.5 MPa)
Radial expansion force	2.4 kN (air pressure 0.5 MPa)

■ : made to order

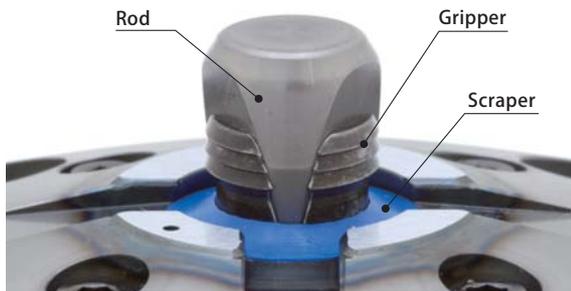

Unclamp

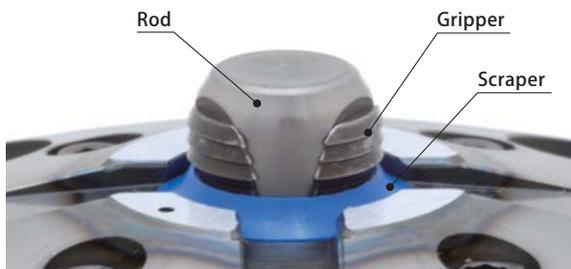


Clamp



Model CGX-N22E with grip inner diameter ø11~ø13 :

During clamping, rod will stroke and expand scraper. Thanks to a new mechanism, open space is removed between rod, gripper, and scraper. As chip intrusion is prevented, air blow during cutting process has been eliminated. (Air blow will only be necessary during clamping and unclamping operation.) As a result, air consumption has been significantly reduced compared to the traditional model.

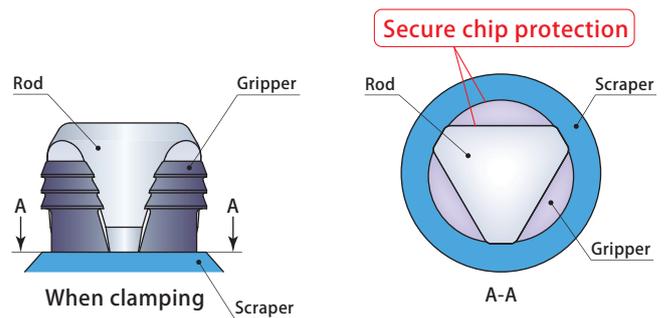


Specifications

Model		CGX-N22E Grip inner diameter
Number of grippers		3
Working air pressure range (MPa)		0.3 ~ 1
Proof pressure (MPa)		1.5
Clamping force*1 (kN)		0.78
Radial expansion force*1 (kN)		2.4
Taper rod stroke (mm)		4.2
Clamp stroke (mm)		1.2
Cylinder capacity	Clamp (cm ³)	7.6
	Unclamp (cm ³)	9.2
Allowable eccentricity (mm)		± 0.5
Recommended air blow pressure (MPa)		0.3
Recommended seating detection air pressure (MPa)		0.2
Operating temperature (°C)		0 ~ 70
Fluid used		Air
Mass (kg)		0.65

*1: Capacity values for air pressure of 0.5 MPa are shown.



Clamping force & air pressure

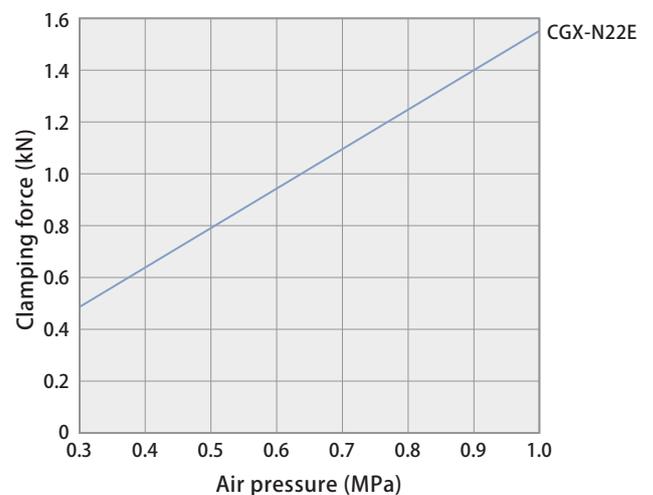



Air pressure (MPa)	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Clamping force (kN)	0.47	0.62	0.78	0.93	1.09	1.24	1.40	1.55

F: Clamping force (kN) = 1.551 × P: Air pressure (MPa)


CGX-N22E 11, 12, 13

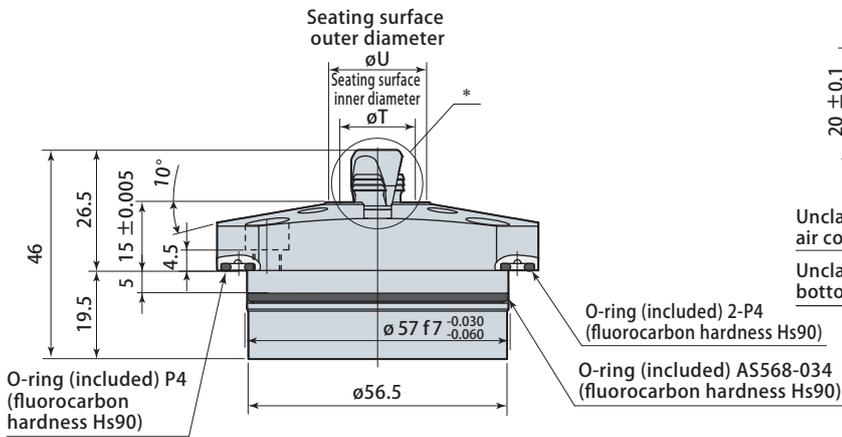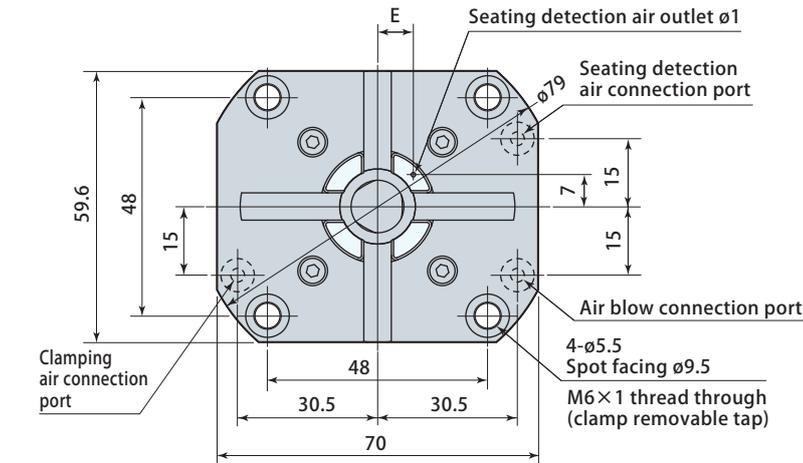


Mounting details

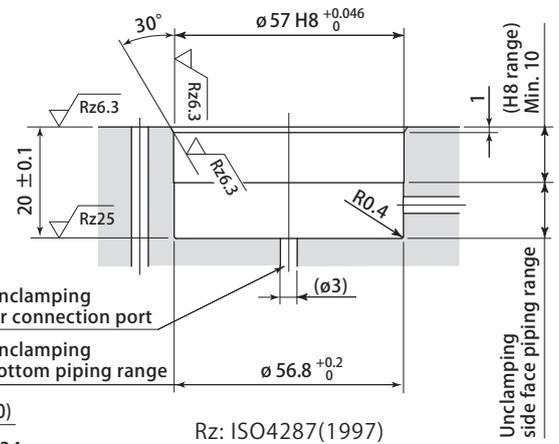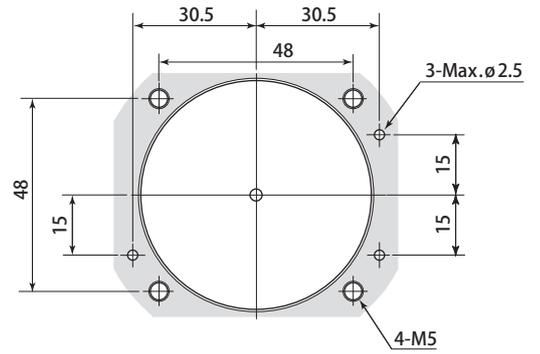

*details

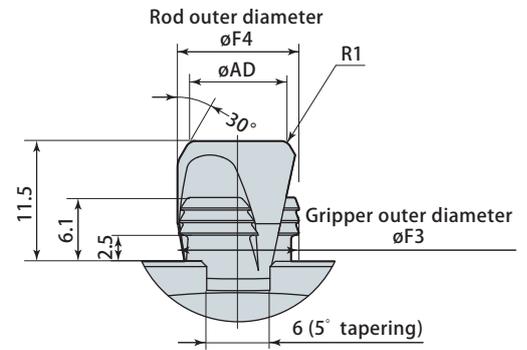

Grip inner diameter usage requirements

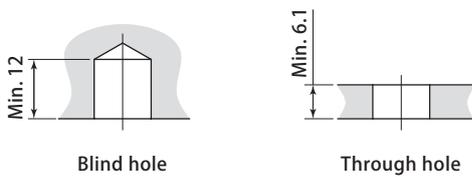

Model	CGX-N22E Grip inner diameter		
Workpiece material (hardness)	Aluminum, steel and others (HRC25 or below). Cast iron are not usable.		
Grip inner diameter (mm)	11	12	13
Allowable min. grip inner diameter (mm)	10.7	11.7	12.7
Allowable max. grip inner diameter (mm)	11.7	12.7	13.7
Grip inner diameter tapering angle (draft angle)	3° or below		
Grip inner diameter circularity	0.1 or below		

Please inquire if above terms are not applied.

(mm)


Model	CGX-N22E Grip inner diameter		
	11	12	13
E	7.1	7.8	8.5
F3	10.5	11.5	12.5
F4	10.55	11.55	12.55
T	15	16	17
U	23	24	25
AD	8.2	9.2	10.2

- Note 1. Mounting screws are not included.
 2. Included O-ring must be used at all times.
 3. Seating surface hardness is HRC55.


2 Grip Non-constant air blow model

Grip inner diameter	ø9 ø10
Model	CGX-N22E Grip inner diameter (Example : CGX-N22E09)
Clamping force	0.8 kN (air pressure 0.5 MPa)
Radial expansion force	2.4 kN (air pressure 0.5 MPa)

■ : made to order

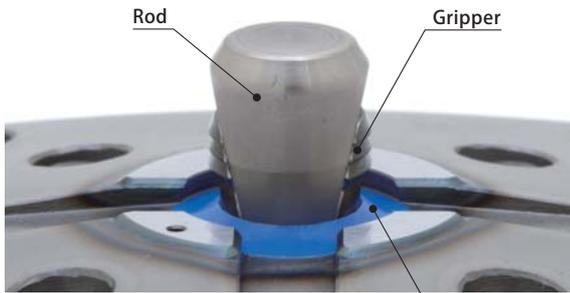

Unclamp

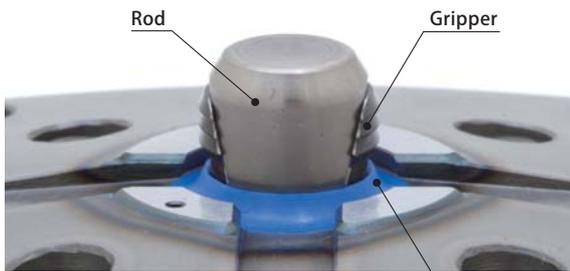


Clamp



Model CGX-N22E with grip inner diameter ø9 and ø10 :

During clamping, rod will stroke and expand scraper. Thanks to a new mechanism, open space is removed between rod, gripper, and scraper. As chip intrusion is prevented, air blow during cutting process has been eliminated. (Air blow will only be necessary during clamping and unclamping operation.) As a result, air consumption has been significantly reduced compared to the traditional model.

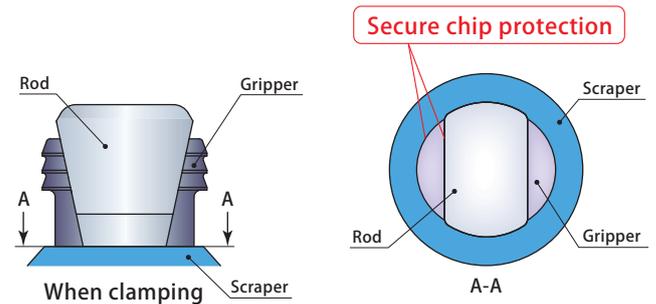


Specifications

Model	CGX-N22E Grip inner diameter	
Number of grippers	2	
Working air pressure range (MPa)	0.3 ~ 1	
Proof pressure (MPa)	1.5	
Clamping force*1 (kN)	0.78	
Radial expansion force*1 (kN)	2.4	
Taper rod stroke (mm)	4.2	
Clamp stroke (mm)	1.2	
Cylinder capacity	Clamp (cm ³)	7.6
	Unclamp (cm ³)	9.2
Allowable eccentricity (mm)	± 0.5	
Recommended air blow pressure (MPa)	0.3	
Recommended seating detection air pressure (MPa)	0.2	
Operating temperature (°C)	0 ~ 70	
Fluid used	Air	
Mass (kg)	0.64	

*1: Capacity values for air pressure of 0.5 MPa are shown.

Clamping force & air pressure




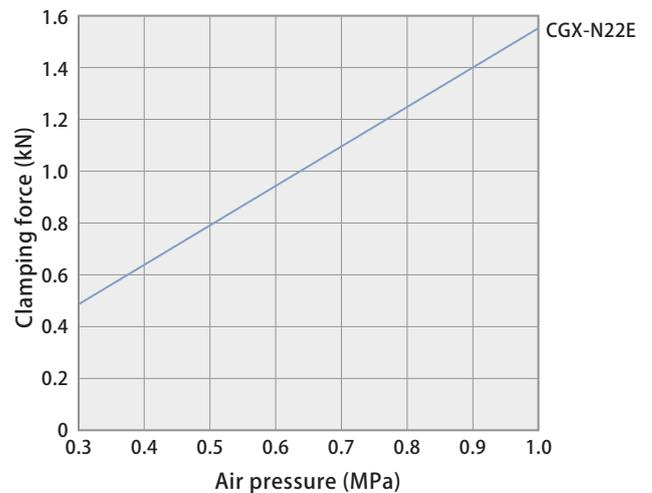


Air pressure (MPa)	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Clamping force (kN)	0.47	0.62	0.78	0.93	1.09	1.24	1.40	1.55

F: Clamping force (kN) = 1.551 × P: Air pressure (MPa)


CGX-N22E 09, 10

Mounting details

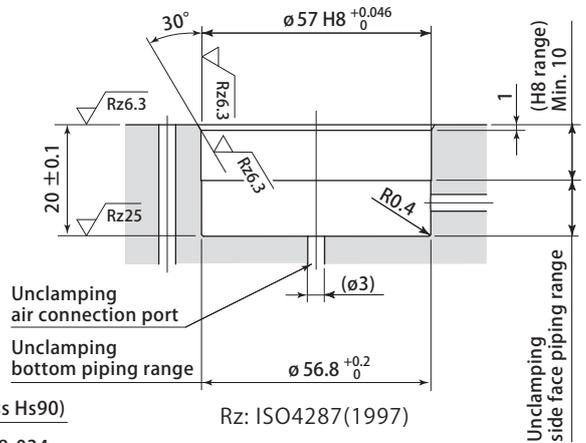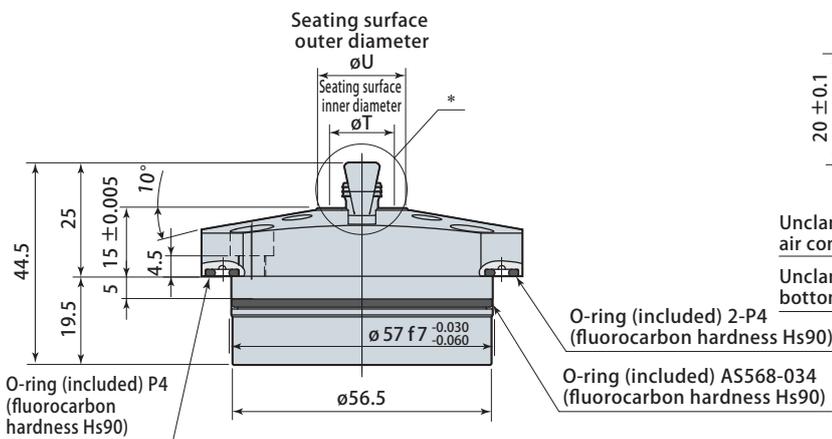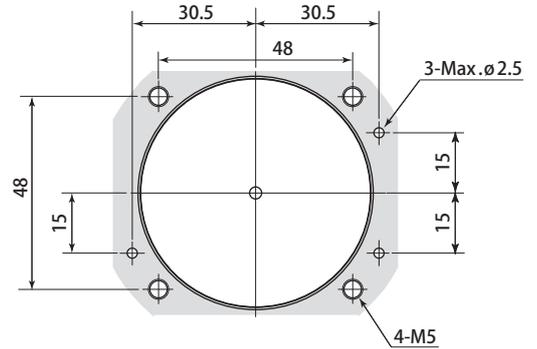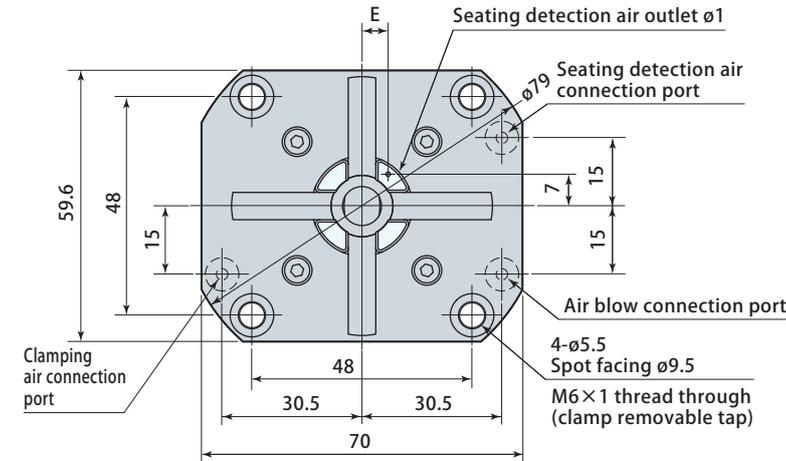


*details

Rod outer diameter

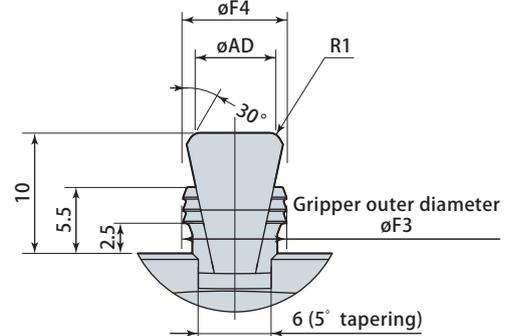

(mm)

Grip inner diameter usage requirements

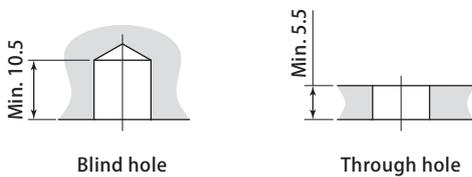

Blind hole

Through hole

Model	CGX-N22E Grip inner diameter	
Workpiece material (hardness)	Aluminum, steel and others (HRC25 or below). Cast iron are not usable.	
Grip inner diameter (mm)	9	10
Allowable min. grip inner diameter (mm)	8.7	9.7
Allowable max. grip inner diameter (mm)	9.7	10.7
Grip inner diameter tapering angle (draft angle)	3° or below	
Grip inner diameter circularity	0.1 or below	

Please inquire if above terms are not applied.

Model	CGX-N22E Grip inner diameter	
	09	10
E	5.7	6.4
F3	8.5	9.5
F4	8.55	9.55
T	13	14
U	21	22
AD	6.8	7.8

Note 1. Mounting screws are not included.

2. Included O-ring must be used at all times.


3. Seating surface hardness is HRC55.

4 Grip

Air blow model


Grip inner diameter	ø6 ø7 ø8
Model	CGX-N22- <u>Grip inner diameter</u> (Example: CGX-N22-06)
Clamping force	0.8 kN (air pressure 0.5 MPa)
Radial expansion force	2.4 kN (air pressure 0.5 MPa)

■ : made to order

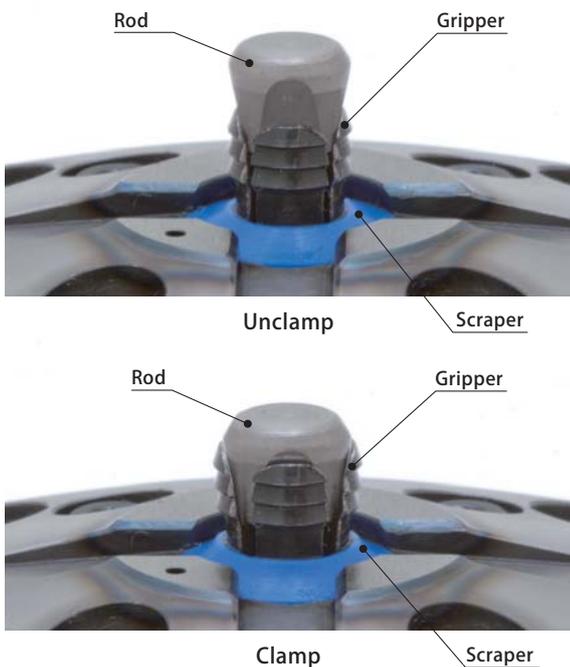

Model CGX-N22- with grip inner diameter ø6~ø8:

During clamping, a space is created between the rod, gripper, and scraper as a result of having a small diameter. Constant air blow will be necessary to prevent intrusion of metal chips during the cutting process and during clamping and unclamping.

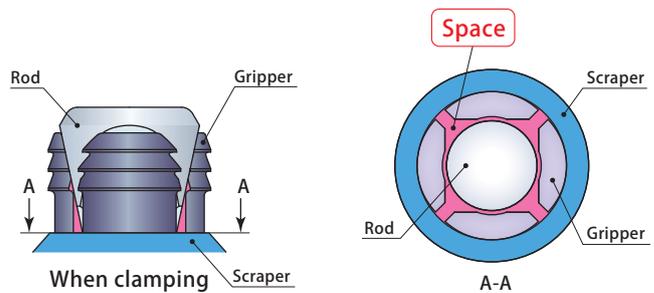


Specifications

Model	CGX-N22- <u>Grip inner diameter</u>		
	06	07	08
Number of grippers	4		
Working air pressure range (MPa)	0.3~0.8	0.3~1	
Proof pressure (MPa)	1.5		
Clamping force*1 (kN)	0.78		
Radial expansion force*1 (kN)	2.4		
Taper rod stroke (mm)	4.2		
Clamp stroke (mm)	1.2		
Cylinder capacity	Clamp (cm ³)	7.6	
	Unclamp (cm ³)	9.2	
Allowable eccentricity (mm)	± 0.5		
Recommended air blow pressure (MPa)	0.3		
Recommended seating detection air pressure (MPa)	0.2		
Operating temperature (°C)	0 ~ 70		
Fluid used	Air		
Mass (kg)	0.63		

*1: Capacity values for air pressure of 0.5 MPa are shown.

Clamping force & air pressure




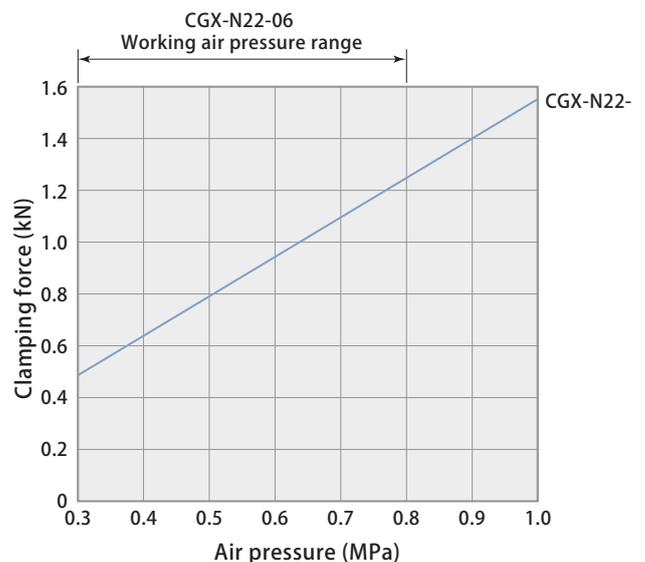


Air pressure (MPa)	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Clamping force (kN)	0.47	0.62	0.78	0.93	1.09	1.24	1.40	1.55

F: Clamping force (kN) = 1.551 × P: Air pressure (MPa)

CGX-N22-06, 07, 08


Mounting details

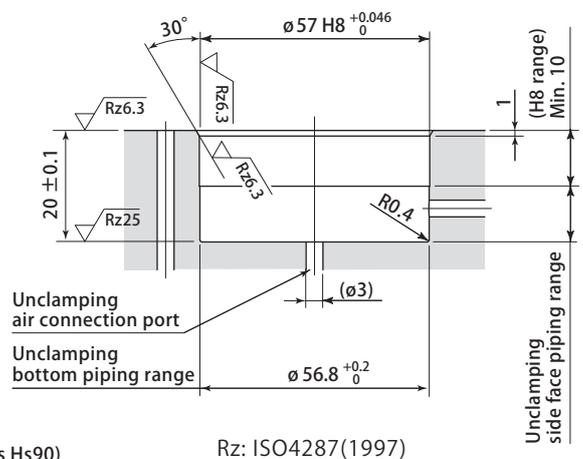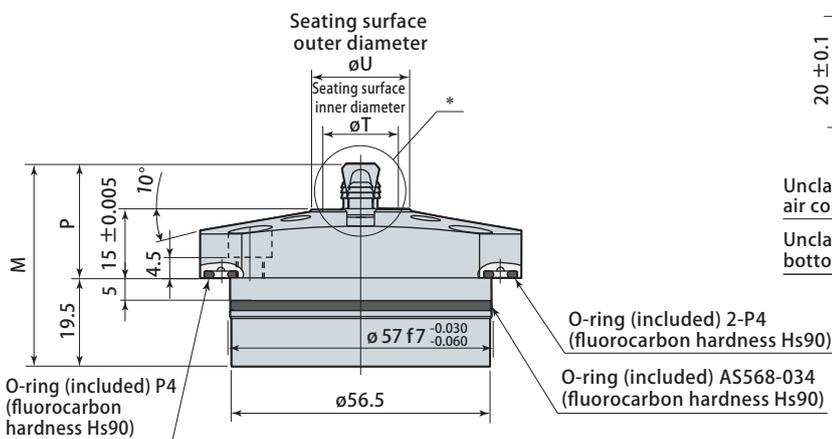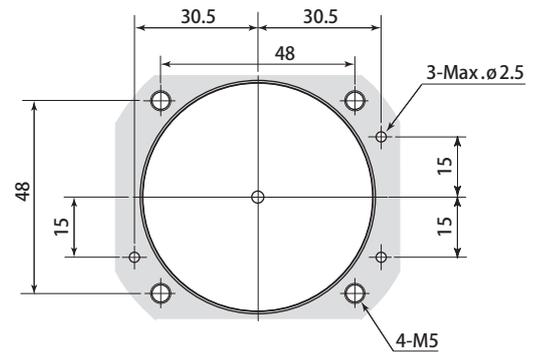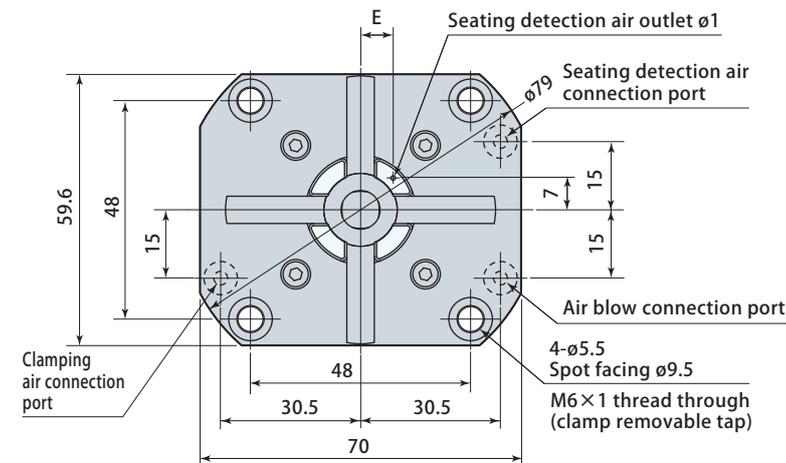

Rz: ISO4287(1997)


*details

Rod outer diameter Gripper outer diameter øR

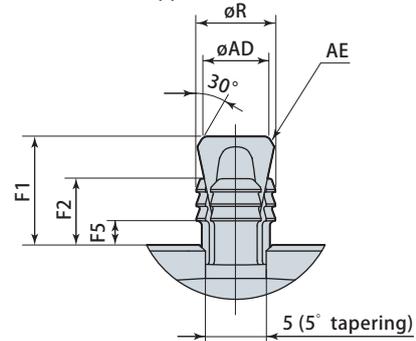


(mm)

Grip inner diameter usage requirements



Blind hole



Through hole


Model	CGX-N22- Grip inner diameter		
Workpiece material (hardness)	Aluminum, steel and others (HRC25 or below). Cast iron are not usable.		
Grip inner diameter (mm)	6	7	8
Allowable min. grip inner diameter (mm)	5.7	6.7	7.7
Allowable max. grip inner diameter (mm)	6.7	7.7	8.7
Grip inner diameter tapering angle (draft angle)	3° or below		
Grip inner diameter circularity	0.1 or below		

Please inquire if above terms are not applied.



Model	CGX-N22- Grip inner diameter		
	06	07	08
E	4.5	4.8	
F1	9		10
F2	5.5		6
F5	2		2.5
M	43.5		44.5
P	24		25
R	5.5	6.5	7.5
T	10	11	12
U		19	20
AD	4.3	5.3	5.8
AE		R0.6	R1

- Note 1. Mounting screws are not included.
- 2. Included O-ring must be used at all times.
- 3. Seating surface hardness is HRC55.

Gripper set replacement

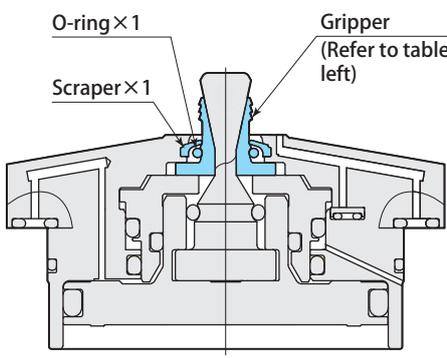Number of grippers	Gripper set model	Clamp model	Set description
4 Grippers	CGX-N22-J06	CGX-N22-06	 <p>O-ring×1 Scraper×1 Gripper (Refer to table left)</p> <p>It is recommended that grippers, scrapers and O-rings be replaced after about 200,000 operations. Replace grippers in sets and not just individual grippers. (Refer to the table on the left for the gripper set model.)</p>
	CGX-N22-J07	CGX-N22-07	
	CGX-N22-J08	CGX-N22-08	
2 Grippers	CGX-N22EJ09	CGX-N22E09	
	CGX-N22EJ10	CGX-N22E10	
3 Grippers	CGX-N22EJ11	CGX-N22E11	
	CGX-N22EJ12	CGX-N22E12	
	CGX-N22EJ13	CGX-N22E13	

Grip inner diameter & rod height when clamping

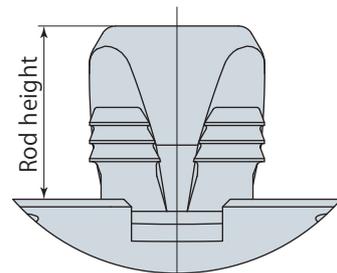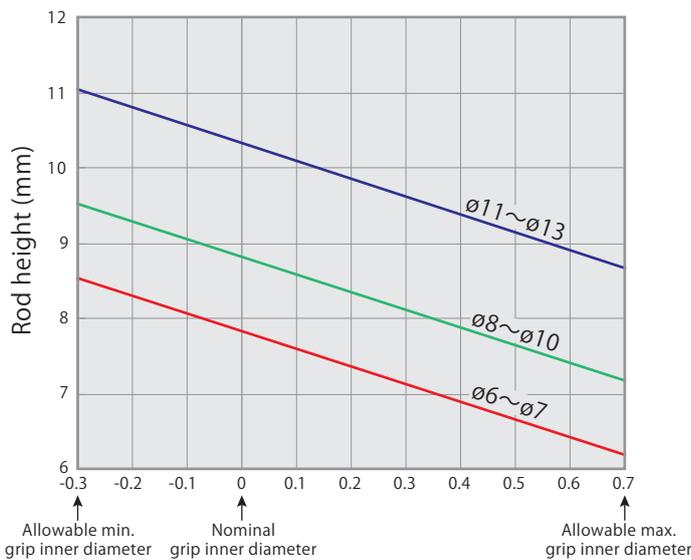


Rod height calculation formula

- ø6 ~ ø7 : $7.82 - 2.35 \times$ Actual grip inner diameter and nominal grip diameter difference
- ø8 ~ ø10 : $8.82 - 2.35 \times$ Actual grip inner diameter and nominal grip diameter difference
- ø11 ~ ø13 : $10.32 - 2.35 \times$ Actual grip inner diameter and nominal grip diameter difference

Example: When CGX-N22E10 (Nominal grip diameter: ø10) is clamping ø9.8 hole

$$\text{Rod height} = 8.82 - 2.35 \times (-0.2) = 9.29\text{mm}$$

System configuration example

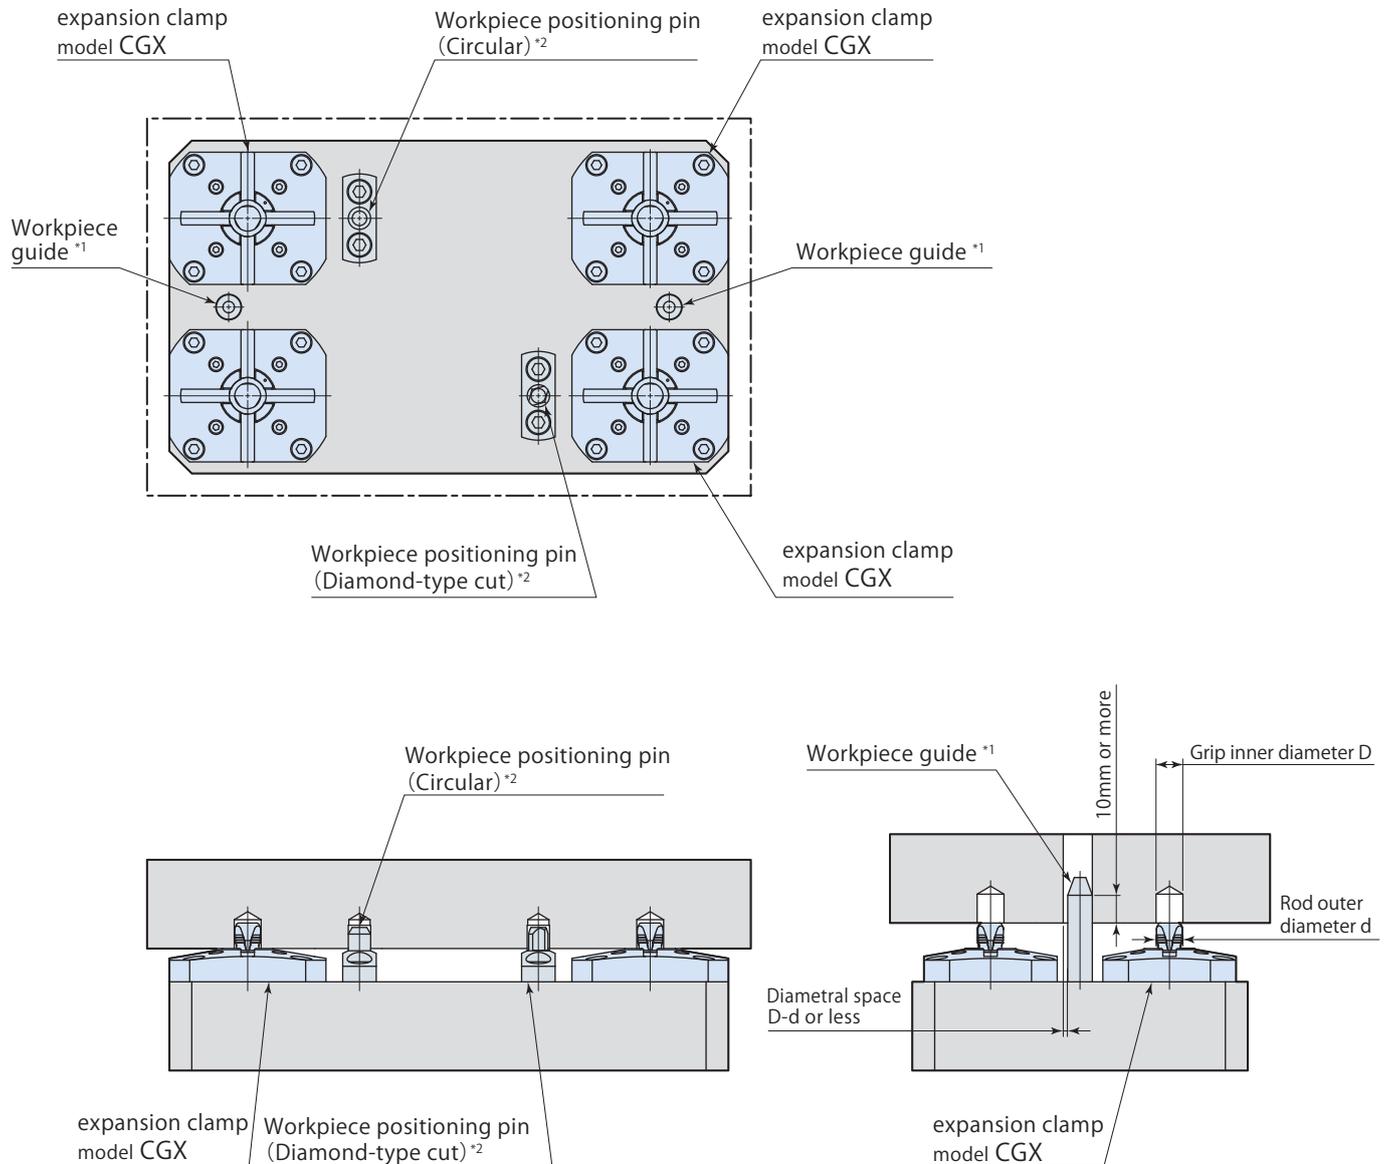

*1: When using automatic or robotic conveyers, prevent damage to clamp caused from impact by setting workpiece guides.

Using the above guide as reference, accurately position the holes when using workpiece guides.

*2: The expansion clamp does not have a workpiece positioning function.

Please install workpiece positioning pins (or similar).

Caution in use

- Be sure to make inner diameter of air blow circuit 4mm or more except for clamp mounting surface.
- Set the workpiece in such a way that the clamping hole of workpiece is perpendicular to seating surface. Clamping in tilted condition results in uneven contact of gripper with hole, which leads to concentration of load that may cause damage.
- Verify that there are no metal chips or debris on seating surface of clamping hole and clamp body before setting workpiece. Allowing intrusion of metal chips results in insecure clamping, which can lead to low grade of machining accuracy.
- Flaring (biting) of gripper into workpiece varies depending on workpiece material or thermal processing conditions. With regards to conditions of workpiece and clamping hole, refer to **page →10, 12, 14** . Secure clamping is not possible when workpiece or clamping hole that does not satisfy these conditions is used.
- If clamping hole serves as taper hole (cast draft hole with gradient), then perform test clamping using applicable workpiece beforehand to verify that there are no problems with operations.
- Deformation may occur if the thickness of clamping hole section of workpiece is extremely thin. Use applicable workpiece to perform test clamping beforehand to verify that there are no deformations in thin portion.
- Supply the dry and filtered air. Particulate size 5 μm or less is recommended.
- Measure seating surface flatness with air pressure applied on clamping side, or by applying air pressure on neither clamping nor unclamping side.
- Set detection range of seating detection air sensor to 0.05 mm or less from seating surface. Insert a feeler gauge between workpiece and seating surface to create detection distance in order to perform setting accurately. Refer to instruction manual of air sensor for details on setting methods.
- Perform unclamping completion detection, clamping completion detection and incomplete clamping detection with combination actions of pressure switch and sensor shown in table below. (Refer to air circuit diagram.)

Applications	Pressure switch 1 (P.S. 1)	Pressure switch 2 (P.S. 2)	Air sensor
Unclamping completion detection	OFF	ON	ON*
Clamping completion detection	ON	OFF	ON
Incomplete clamping detection	ON	OFF	OFF


*:In case of a lightweight workpiece or the like, sensor may be OFF.

Air sensor recommended condition of use

Supplier and model	ISA3-F/G series manufactured by SMC GPS2-05, GPS3-E series manufactured by CKD
Air supply pressure	0.2 MPa
Inner diameter of piping	ø4 mm (ISA3-F:ø2.5 mm)
Overall piping length	5 m or less


- Use a solenoid valve with needle for air sensor unit and control it supplying air all the time in order to eliminate intrusion of chips or coolant.
- There is a case that air sensing cannot be made successfully as designed when it is used out of the usage shown on the left. Contact Technical service center for more details.

Non-constant air blow model pneumatic circuit diagram

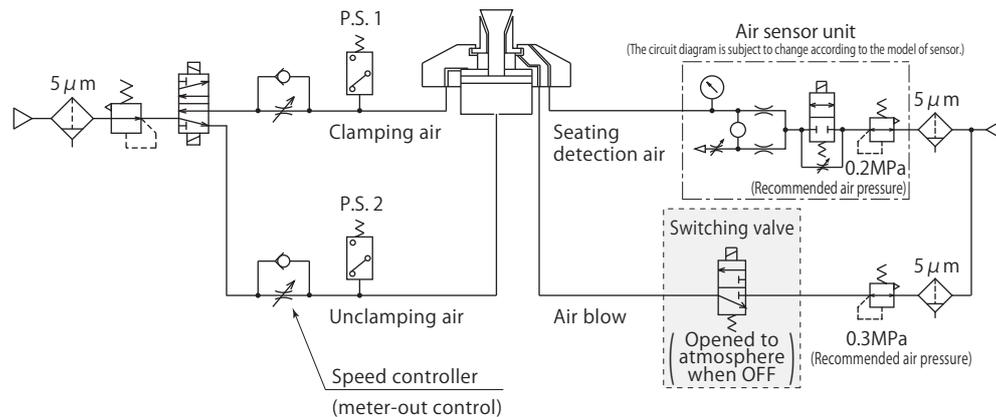

- Be sure to install a speed controller for meter-out control in unclamping air circuit and to adjust clamping speed by means of back pressure. (0.3 seconds and over when full stroking.) Immediate air pressure release of unclamping side of the clamp causes insufficient grip at wall of the clamping hole, which may result in incomplete clamping.
- Air blow will not be necessary during cutting process. Be sure to air blow upon loading and unloading workpiece and when clamping and unclamping to remove metal chips and debris.
- Be sure to turn air blow OFF while seating detection is occurring. Also, be sure to use an air switching valve that is opened to atmosphere when air blow is OFF. (When incomplete clamping occurs, it is used as a seating detection air exhaust path.)

Air blow model pneumatic circuit diagram

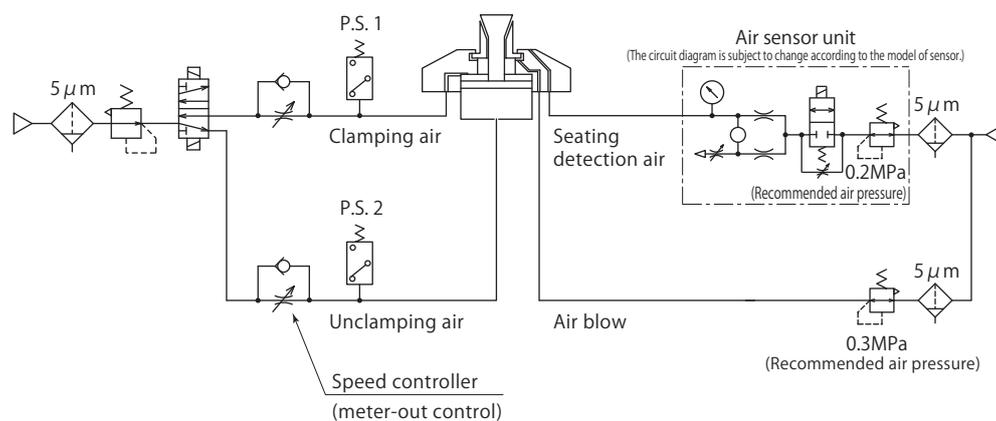

- Be sure to install a speed controller for meter-out control in unclamping air circuit and to adjust clamping speed by means of back pressure. (0.3 seconds and over when full stroking.) Immediate air pressure release of unclamping side of the clamp causes insufficient grip at wall of the clamping hole, which may result in incomplete clamping.
- Be sure to air blow upon loading and unloading workpiece and when clamping and unclamping. During cutting, if chips adhere to the gripper such as when going through the clamp hole, continue air blowing during processing as well.

Standard

Long neck

Long neck
(no seating)

Eccentric



model
CGC

model
CGT

model
CGT-R





model
CGU

Clamp 7MPa
Unclamp 7MPa

Clamp 7MPa
Unclamp 7MPa

Clamp 7MPa
Unclamp 7MPa

Clamp 7MPa
Unclamp 7MPa

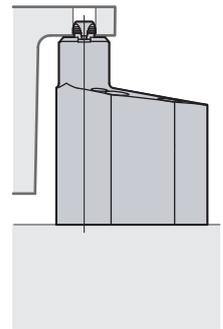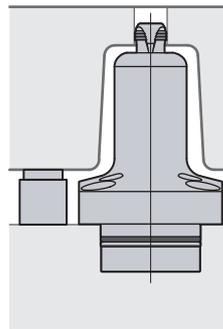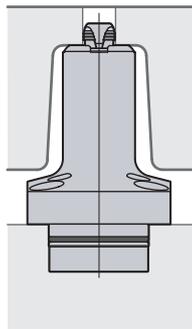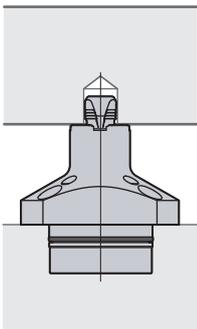


Seating surface is set apart from clamp.

Flat



model
CGS-N1

Clamp 7MPa
Unclamp spring

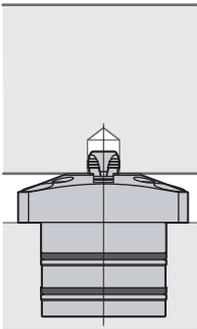


air
Standard



model
CGE

Clamp air
Unclamp air

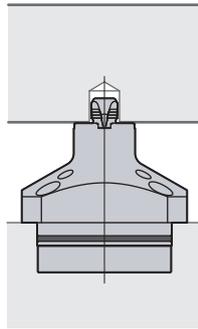


air
Long neck



model
CGY-F2

Clamp air
Unclamp air

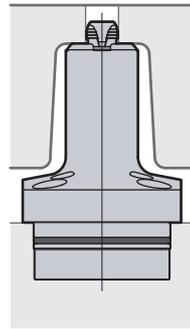


air
Long neck



model
CGY-F3

Clamp spring
Unclamp air

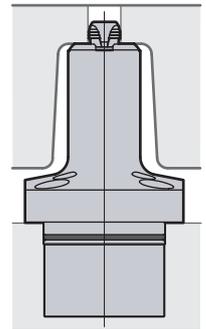

Refer to separate documents for details.

Pascal

Itami, Hyogo, Japan 664-8502
TEL. 072-777-3333 FAX. 072-777-3520



CERTIFICATE OF APPROVAL ISO9001